



## Installation instructions for 2007 GSX-R1000/750 PAIR block-off cap BPP-S1007-CAP

BPP-S1007-CAP is used to block off emissions (PAIR) to help prevent 'deceleration pop' and also prevents ram-air pressure loss from the airbox after blocking the PAIR.

1. Lift and prop gas tank.
2. Remove PAIR hose from air box port located on front right of air box (while seated on bike.) See figure 1.



Fig. 1.

3. Place BPP-S1007-CAP on port of air box as shown in figure 2.



Fig. 2.

4. Re-install PAIR hose over BPP-S1007-CAP and port as shown in figure 3. (Note: WD-40 may be helpful for installation.)

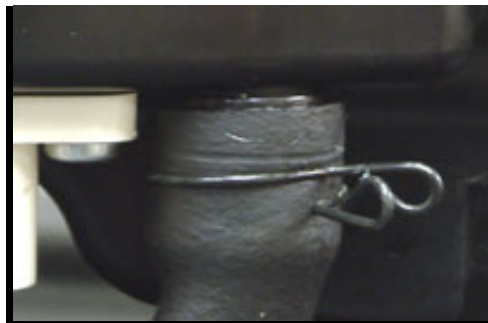


Fig. 3.

5. Lower tank.

For more information go to [www.BrocksPerformance.com](http://www.BrocksPerformance.com), **click:** Installation Instructions  
email: [advice@brockracing.com](mailto:advice@brockracing.com), or call the Tech Line: 937-910-0061  
**Brock's Performance Products policies and warranty information: [www.BrocksPerformance.com](http://www.BrocksPerformance.com), click:** Policies  
Brock's Performance Products are designed for Closed-Course Racetrack use ONLY!