



[Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062](#)

NINJA H2 (15-17) PAIR VALVE BLOCK-OFF INSTRUCTIONS



The black cap (#832648) included with your Ninja H2 (15-17) exhaust system is used to block the clean air system (PAIR) to prevent unwanted air from entering the exhaust system. Blocking the clean air system prevents 'deceleration pop' and is necessary for proper dyno tuning.

Installation Instructions:

- Remove fuel tank cover (see factory service manual).
- Locate the PAIR hose in front of the intake plenum and remove from nipple. (Figure 1- *fuel tank removed for clarity*).
- Lubricate the black cap using WD-40 or Windex.
- Use a long, slender, and dull-ended object e.g. Sharpie marker or 3/8" drive extension (to prevent damage to the cap during installation) and push the cap into the PAIR hose (Figure 2).
- Reinstall the PAIR hose onto the nipple.
- Reinstall fuel tank cover (see factory service manual).



For additional support please refer to the OEM service manuals. They can be found here:
[BrocksPerformance.com > Customer Service > Installation Instructions > Ninja H2 Factory Service Manuals](#)

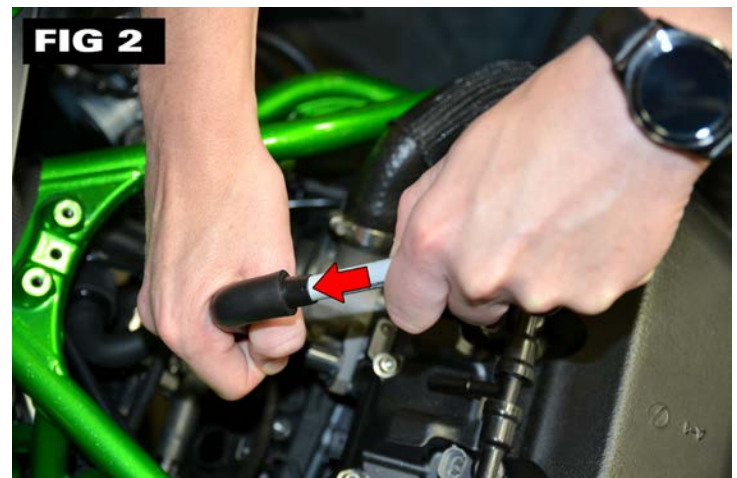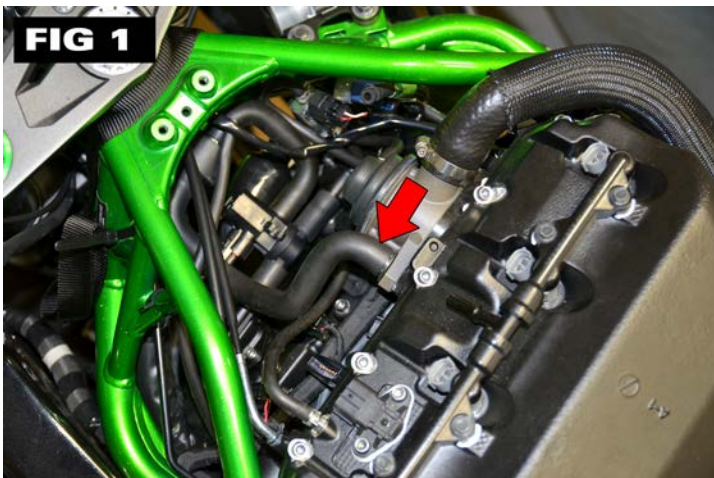

All Brock's Performance products are designed for closed-course racetrack use ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions: www.BrocksPerformance.com
 > About Us > Terms and Conditions

For Questions and Comments: www.BrocksPerformance.com > Customer Service > Contact Us
 or call the Tech Line 937-912-0054