




Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062


HAYABUSA (99-07) ALIEN HEAD 2 / SHORTMEG 2 SPACER KIT (#900998) INSTRUCTIONS

To gain proper clearance on the Gen 1 Hayabusa when installing the Alien Head 2 or ShortMeg 2 Full Exhaust System it is necessary to install our Spacer Kit (#900998) on the radiator bracket and belly pan fairing.

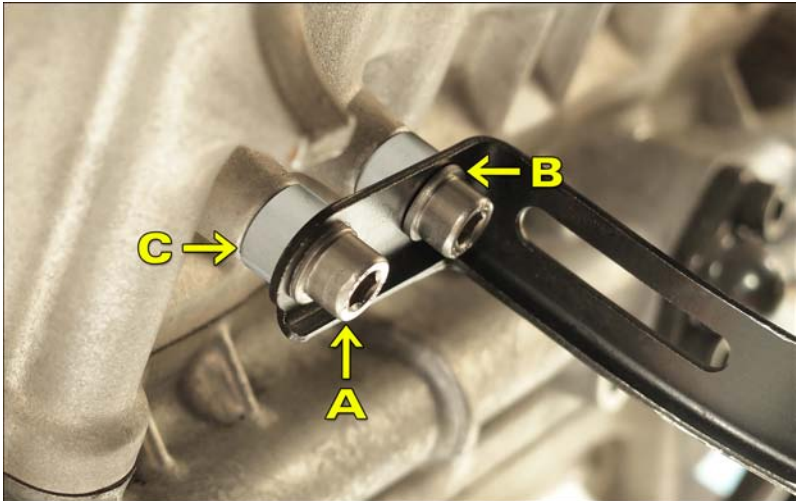

STEP 1 (Radiator Bracket): The OEM bolts will no longer be required. Place one washer (B) on each bolt (A) and insert through OEM radiator bracket. Place one spacer (C) on each bolt before tightening to the engine block. This spacer provides adequate clearance between the exhaust pipes and radiator.

- A – M6 x 18mm Socket Head Bolt (x2)
- B – M6 Flat Washer 12mm OD (x2)
- C – .25 x .50 DIA Radiator Spacers (x2)

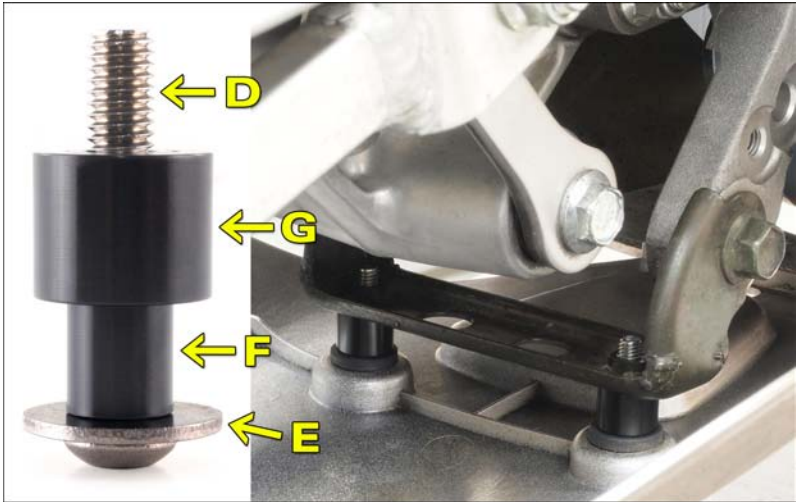

STEP 2 (Belly Pan): The OEM bolts will no longer be required. Place one washer (E) on each bolt (D), followed by one spacer (F) on each bolt. Insert assembly through the underside of the belly pan. Place one spacer (G) over the assembly (between the belly pan & bracket) before tightening to the bracket.

- D – M6 x 35mm Button Head Bolt (x2)
- E – M6 Flat Washer 18mm OD (x2)
- F – .90 x .37 DIA Belly Pan Stand-Off Spacer (x2)
- G – .50 x .62 DIA Belly Pan Spacer (x2)

All Brock's Performance products are designed for closed-course racetrack use ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions: www.BrocksPerformance.com
> About Us > Terms and Conditions

For Questions and Comments: www.BrocksPerformance.com > Customer Service > Contact Us
or call the Tech Line 937-912-0054