



Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

## NOISE SUPPRESSORS (2.00" & 2.25") PRODUCT INFORMATION

**Noise Suppressors are designed to provide users with an easily removable option for significant noise reduction with minimal effect on horsepower and sound quality.**

### Package Contents:

Noise Suppressor shown:


1. One (1) Noise Suppressor Insert
2. One (1) Noise Suppressor Mounting Body
3. Two (2) Mounting Clamps
4. Two (2) Button Head Screws
5. Two (2) 5/16" Hex Nuts



### Installation Notes:

**Caution:** Exhaust components will be HOT after use. Allow time to cool before installation or removal.

- Installs to 2.00" or 2.25" select Brocks Performance full exhaust systems and slip-ons.
- Easily installs using a 5/16" (8mm) wrench.
- The noise suppressor will sit flush with the muffler outlet. Use a soft-faced mallet to tap into place as needed (Fig 1).
- After installing the noise suppressor, give it a good pull to check for a secure fit to the muffler.
- The button head screws come installed with high-temp red threadlocker. The button head screws should not be removed during normal operation. In the event removal is required, apply high-temp red threadlocker to the upper four threads of the button head screws.
- The actual decibel reading from the exhaust will vary depending on the bike and modifications.
- **Note:** Due to heat, pressure, and vibration (**notably on the Ninja H2**) noise suppressor mounting nuts can loosen over time. Periodically check the noise suppressor for a secure fit.

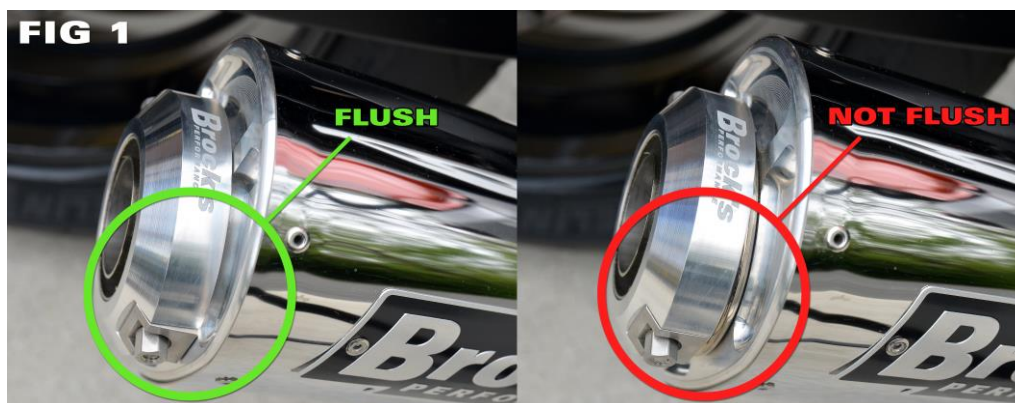

**All Brock's Performance products are designed for closed-course racetrack use ONLY!**

For more information on Brock's Performance Warranty and Terms and Conditions: [www.BrocksPerformance.com](http://www.BrocksPerformance.com)  
> About Us > Terms and Conditions

For Questions and Comments: [www.BrocksPerformance.com](http://www.BrocksPerformance.com) > Customer Service > Contact Us  
or call the Tech Line 937-912-0054