



[Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062](#)


PERFORMANCE BAGGER™ (09-18) SWINGARM PRODUCT INFORMATION

The Performance Bagger™ Swingarm by Brock's Performance is designed to be a direct bolt-on replacement for the OEM FL Swingarm. Any modifications from the original configuration can create clearance issues. If proper clearance is not maintained, damage to the bike, serious injury or death to the rider may occur. To assure proper installation, follow the OEM service manual and torque specifications.

Package Contents:

Performance Bagger™ Swingarm shown here:

1. One (1) Aluminum Swingarm
2. One (1) Rear Axle
3. Two (2) Spherical Bearings (Installed)
4. Two (2) Axle Blocks
5. Two (2) Outer Spacers
6. Two (2) 3/4" Inner Spacers
7. One (1) Brake Mount w/ Screws (x4)
8. One (1) Blue Threadlocker (Not Shown)

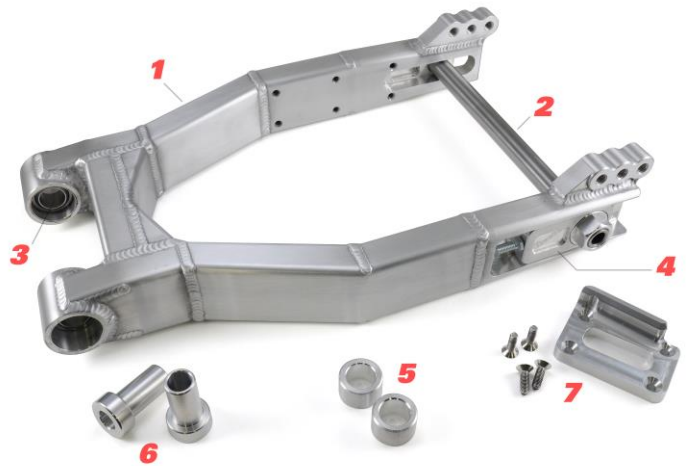

For additional support please refer to your OEM Harley-Davidson® service manual.

Installation Notes:

- Installs using OEM mounting hardware and rubber bushings
- Apply blue threadlocker (supplied) to flat head cap screws (x4) before installation and torque to 24 N-m (18 ft-lb)
- After installing the swingarm check for proper clearance of the following with the shock fully **extended** (rear wheel off the ground)
 - Swingarm to exhaust clearance
 - Swingarm to oil pan clearance
- After installing the swingarm check for proper clearance of the following with the shock fully **compressed** (rider/passenger/gear on the bike)
 - Shock to bag clearance
 - Rear tire to inner fender clearance
 - Belt and chain tension

All Brock's Performance products are designed for closed-course racetrack use ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions: www.BrocksPerformance.com
> About Us > Terms and Conditions

For Questions and Comments: www.BrocksPerformance.com > Customer Service > Contact Us
or call the Tech Line 937-912-0054