


Instructions

Remove 6 stock clutch springs and spring tops. (Do not use)
 Reassemble as shown with new springs, spacers, and spring tops.
 Shims are provided for additional static pressure, recommended for drag use.

Assemble as shown.

Call if you have questions.
 Brock's Performance
 937-912-0054

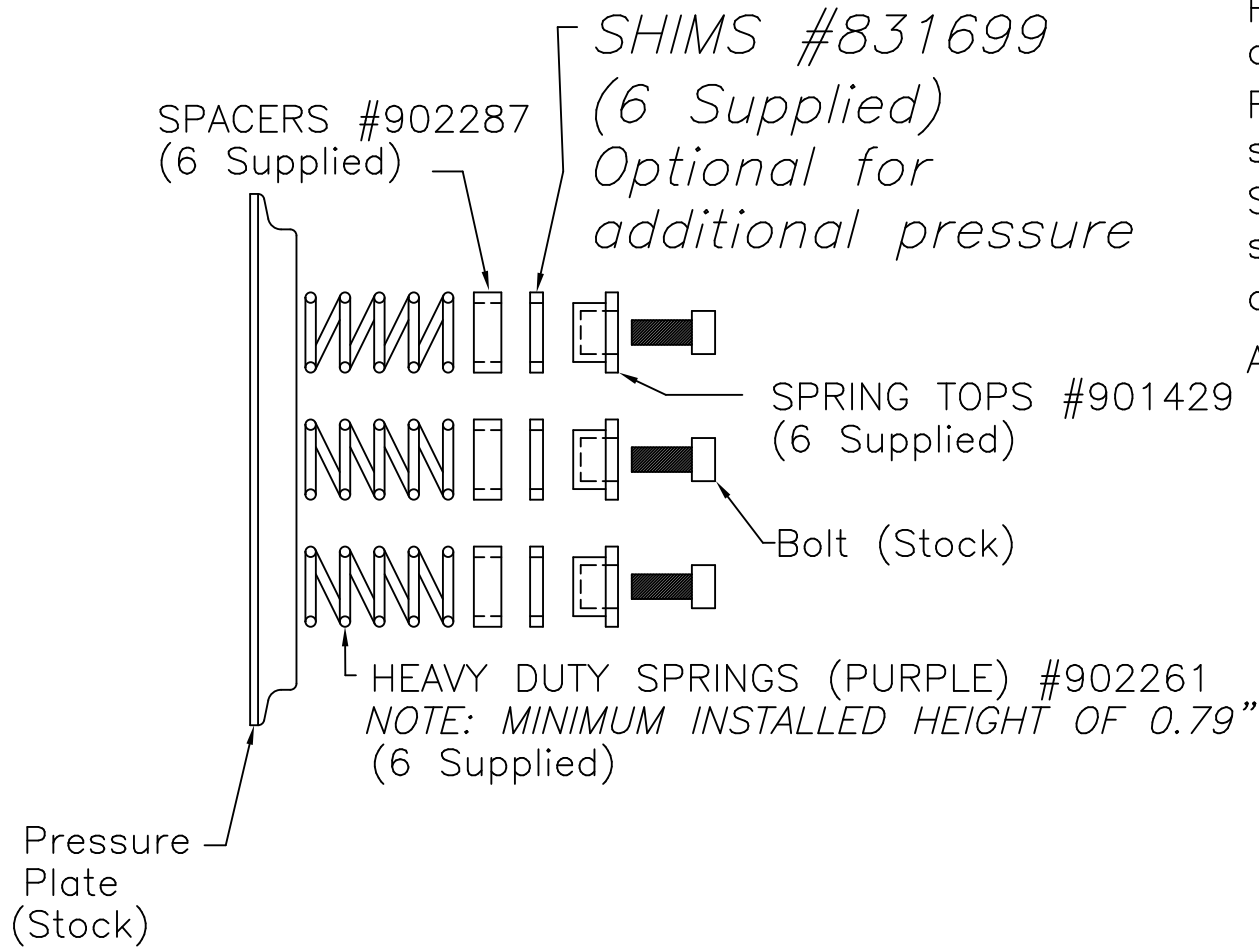

Clutch Assembly— Side View

Not to Scale – Some detail removed for clarity

270630

ITEM	QTY	PN	MFG	DESCRIPTION
STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED				 www.BrocksPerformance.com
.X = + .030 .XX = + .015 .XXX = + .005 .XXXX = + .0005 FRACTIONS = + .020 ANGLES = + 1 DEG				
TITLE				Heavy Duty Clutch Spring Kit ZX-10R (08-16)
SCALE		DESIGNER		MAT'L
None		SR		-
DATE		APP. BY		REV
3/29/11				
SHEET		DRAWING NO.		
1 OF 1		992768_ZX1008-SK.dwg		
SHEET SIZE				
A				