

Brock's Performance • 4064 E. Patterson Road • Dayton, OH 45430 • Phone: 937-912-0054 • Fax: 937-912-0062

KAWASAKI ZX-10R (04-25) HEAVY DUTY CLUTCH SPRING KIT INSTRUCTIONS

The HD Clutch Spring Kit is designed to increase the spring pressure at the clutch plates. Increased spring pressure is necessary for increased power applications to prevent clutch slippage and increase clutch life.

Check Package Contents:

The Package Contents Include:

1. Six (6) Spring Tops
2. Six (6) Heavy Duty Clutch Springs (Purple)
3. Six (6) .280" Shims
4. Six (6) .062" Shims

If your package contents differ, please contact Brock's Performance at 937-912-0054.

For additional installation support please refer to the OEM service manual.



Special Notes:


- Inspect the clutch fully for any signs of wear and/or damage before installation. Replace parts as needed.
- The heavy duty clutch springs have a minimum of .790" installed height.
- Additional clutch spring spacers can be purchased at Brocksperformance.com.
- [Brock's Clutch Mod](#) is required to be used with this heavy duty spring kit.

Instructions:

1. Support the bike using a wheel stand or lift.
2. Remove clutch cover.
3. Remove six (6) OEM springs and spring tops (these will not be reused)
4. Install the supplied clutch springs, .280" shims, and spring tops.

Optional: Install the .062" and .280" shims for additional spring pressure.

5. Secure using the OEM bolts and torque to 97 lb-in (11 N·m)

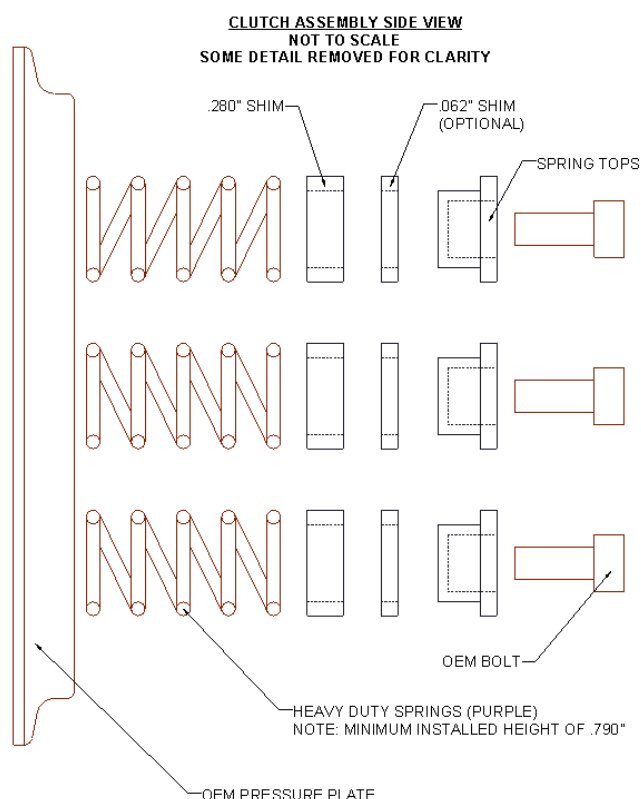

ALL BROCK'S PERFORMANCE PRODUCTS ARE DESIGNED FOR CLOSED-COURSE RACETRACK USE ONLY!

For more information on Brock's Performance Warranty and Terms and Conditions:

BrocksPerformance.com > Brock's Support > Customer Service > Terms and Conditions

For Questions and Comments:

BrocksPerformance.com > Brock's Support > Customer Service > Contact us or call 937-912-0054